


INTERIOR

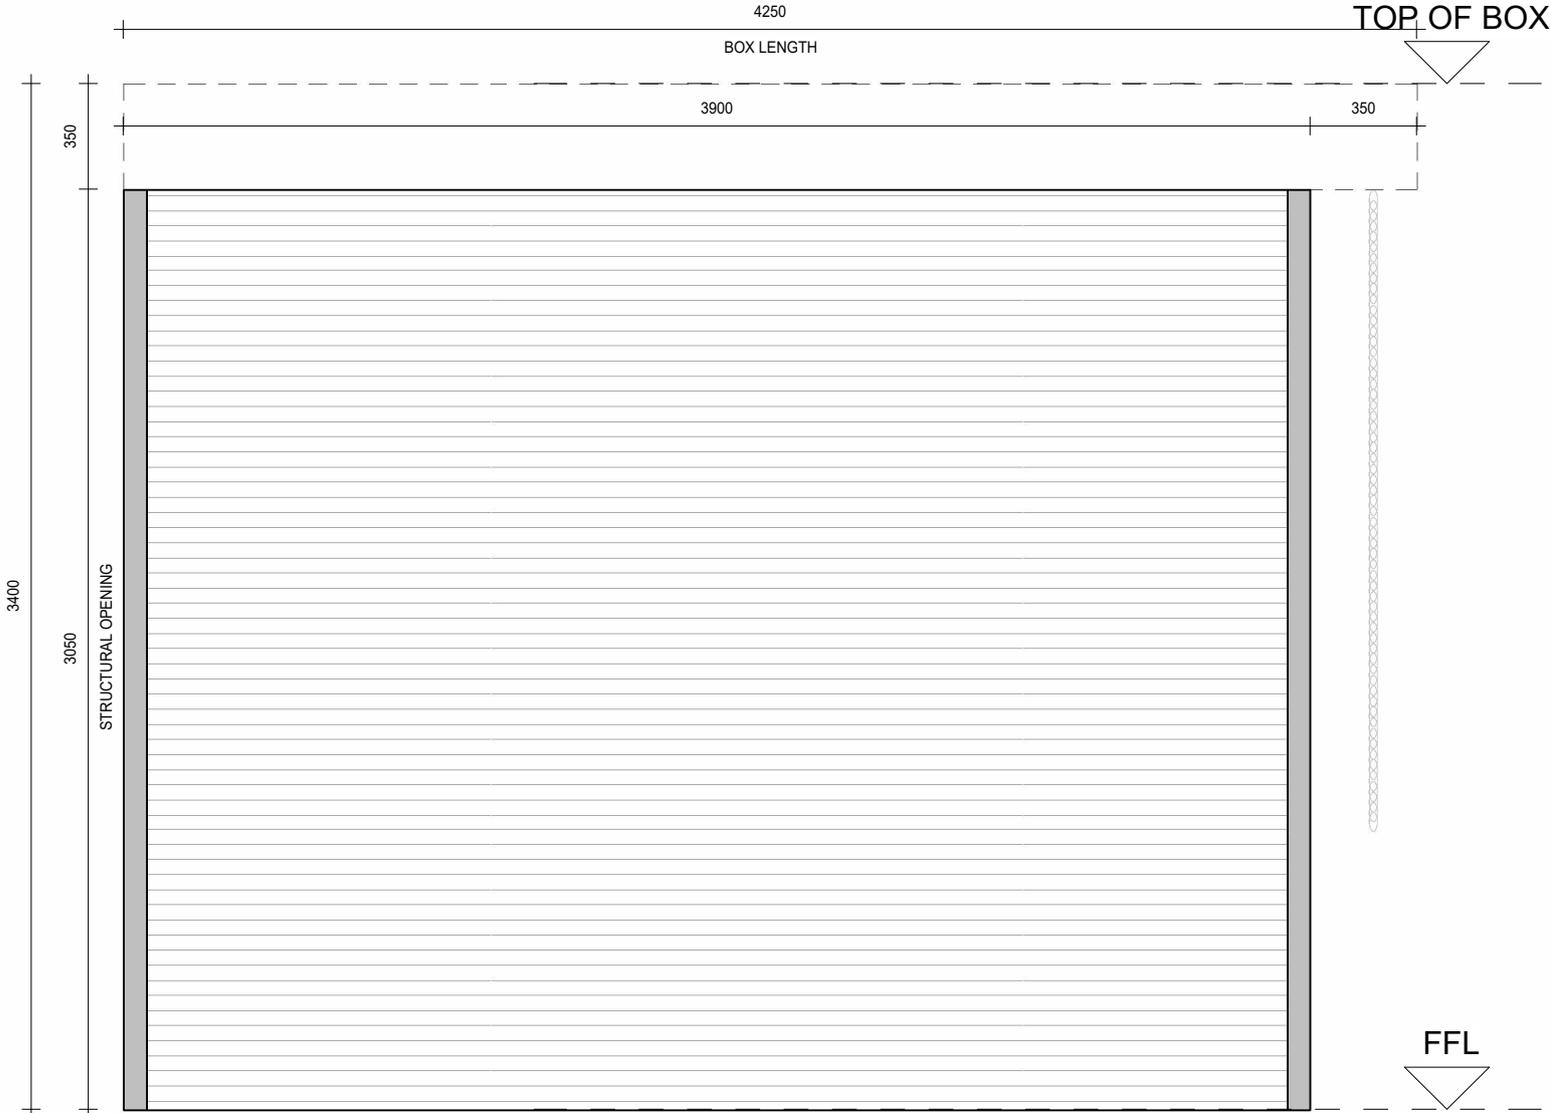

Door Type:	No Off:	Room / Area:				
DOOR: • Size: 3500w x 4598h mm • STEEL ROLLER SHUTTER BY SERRANDA (or equal approved) • SOLID SLATS TO BE MIN. 1.2mm THICK • ELECTRIC OPERATED WITH A MANUAL OVERRIDE SYSTEM		DOOR FRAME: • GUIDES GENERAL: • GUIDE TRACK EDGES TO BE FLUSH WITH OPENING JAMB FINISH • DOOR TO RETRACT FULLY UP TO OPENING SOFFIT & BOX TO BE ABOVE LINTEL • DOOR TO BE SUPPLIED WITH ACCESS CONTROL PANEL READER	IRONMONGERY: LOCK & FURNITURE: • STANDARD LOCK AS SUPPLIED WITH DOOR - GOOD QUALITY ROBUST TYPE TO BE APPROVED BY ARCHITECT			
DOOR FINISHES: • POWDER COATED factory finish to all elements. Paint colour : RAL 7021 • GALVANISED GUIDE-COASTAL						
GENERAL NOTES - All installation procedures to comply with good building practice and deemed to satisfy the Architect's requirements. - All exposed timber to be rubbed down smooth prior the application of any finish. - To be supplied and installed with all door frames. - This drawing to be read in conjunction with GA-layouts and all dimensions to be checked on site. - Refer any discrepancies to the Architect in writing. - All dimensions & levels to be varified on site prior to the commencement of works.			Rev	Date	Int	Description
			A	2024-11-11		For Tender
			B	2024-11-25		For Tender
Title:	Drawing No.	Drawn	Scale	Date	Rev.	
Door Type RS1	OPT-SVA-A-DR-30_1014	Author	1 : 25	2020/09/02	B	