




WALLS & FLOOR DETAILS

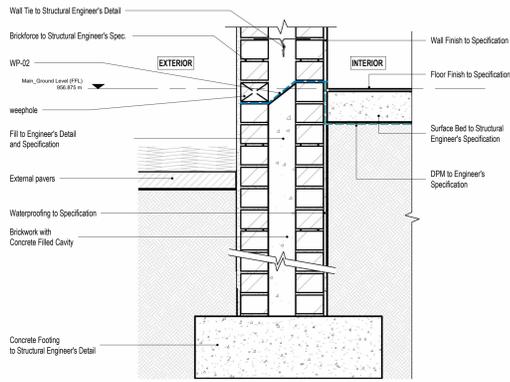

1 Detail - typical strip footing detail
1 : 10

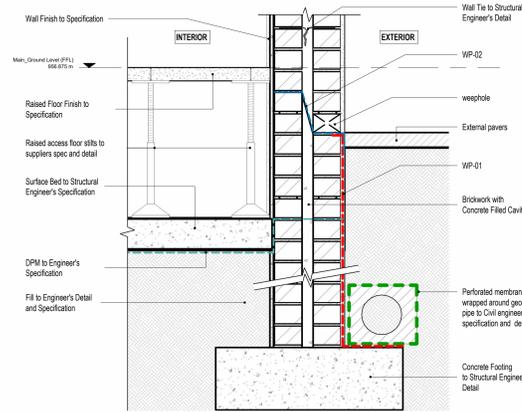

2 Detail - Raised floor detail
1 : 10

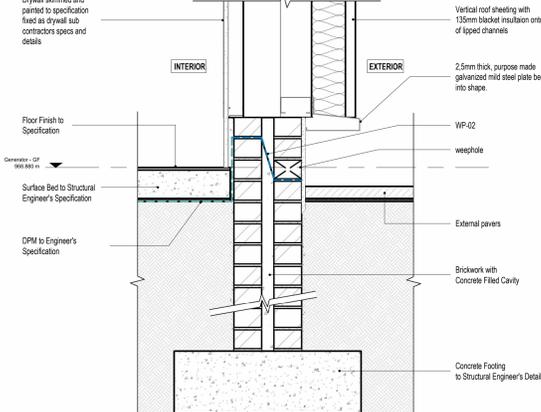

3 Detail - Generator building base
1 : 10

(SINGLE LAYER TORCH-ON POLYESTER WATERPROOFING)
NCC11 Waterproofing shall be applied to approved (Approved Base) approved, applied by an approved specialist waterproofing Contractor, who shall provide a guarantee as to the workmanship and materials used. The waterproofing shall be applied to the exterior walls and shall have a minimum life span of 10 years. The waterproofing shall be applied to the exterior walls and shall have a minimum life span of 10 years. The waterproofing shall be applied to the exterior walls and shall have a minimum life span of 10 years.

(POLYETHYLENE DAMP-PROOF COURSE (DPC))
1) Induline manufacturer: To be agreed.
2) Induline product: To be agreed.
3) Thickness: 200/300 Microns.
4) Lay flat and smooth without wrinkles to ensure joints.
5) Lay 100mm.
6) Lay 100mm.

(MEMBRANE REINFORCED CEMENTITIOUS WATERPROOFING)
1) Induline manufacturer: Sika.
2) Induline product: Sikadur-900/900/900.
3) Thickness: per product specification.
4) Lay 100mm.
5) Lay 100mm.
6) Lay 100mm.


APPLICATION
1) Prime the application of Sikadur-900 the priming coat must have cured for 24 hours. For the Walling Time (Drying Time) refer to the Technical Data Sheet. The application of Sikadur-900 must be done in a minimum of 100mm. The application of Sikadur-900 must be done in a minimum of 100mm. The application of Sikadur-900 must be done in a minimum of 100mm.

NOTES


- The design on this drawing is copyright and remains the property of SVA International (Pty) Ltd. Ref: No 2017/13728057
- All work to be carried out in accordance with local authority requirements, National Building Regulations, and the S.A.S. standards.
- This drawing may not be issued. All Agreed dimensions and levels may be altered.
- All relevant details, levels, and dimensions must be checked on site before commencement of work. Any discrepancies to be reported to the Architects office immediately.

REVISIONS


Rev	Date	Issued by	Description
A	2024-11-13	For Tender	
B	2024-12-03	For Tender	

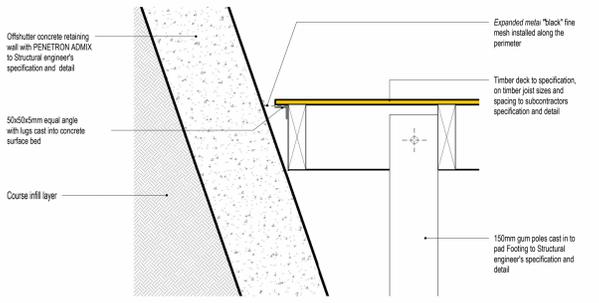

4 Detail - Timber decking
1 : 10

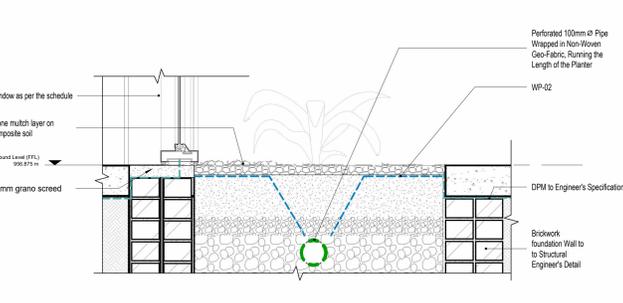

5 Detail - Passage internal planter
1 : 10

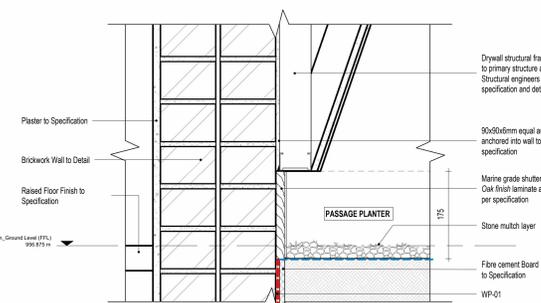

6 Detail - Passage skirting
1 : 5

(DOUBLE LAYER TORCH-ON BITUMEN EMULSION COATING)
1) Induline manufacturer: Sika.
2) Induline product: Sikadur-109.
3) Thickness: 2mm.
4) Colour: Brown/Black Liquid.


APPLICATION INFORMATION
Substrate Must be Clean, Dry, and free of any moisture. The surface must be prepared by sanding, grinding, or otherwise to achieve a surface that is free of any contaminants. The surface must be prepared by sanding, grinding, or otherwise to achieve a surface that is free of any contaminants. The surface must be prepared by sanding, grinding, or otherwise to achieve a surface that is free of any contaminants.

APPLICATION METHOD/ TOOLS
Manual Application. Apply in two coats, or not risk the product with other materials, apply by brush.


(DOUBLE LAYER TORCH-ON BITUMEN WATERPROOFING)
1) Induline manufacturer: Sika.
2) Induline product: Sikadur-109.
3) Thickness: 2mm.
4) Colour: Brown/Black Liquid.

APPLICATION INFORMATION
Substrate Must be Clean, Dry, and free of any moisture. The surface must be prepared by sanding, grinding, or otherwise to achieve a surface that is free of any contaminants. The surface must be prepared by sanding, grinding, or otherwise to achieve a surface that is free of any contaminants.


APPLICATION METHOD/ TOOLS
Manual Application. Apply in two coats, or not risk the product with other materials, apply by brush.

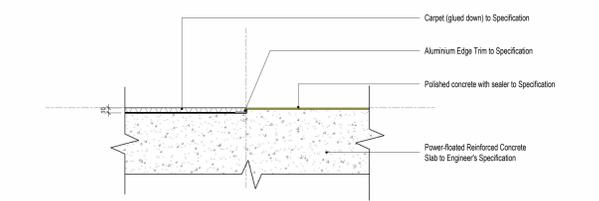


7 Floor transition details_ CARPET - POLISH CONCRETE
1 : 5

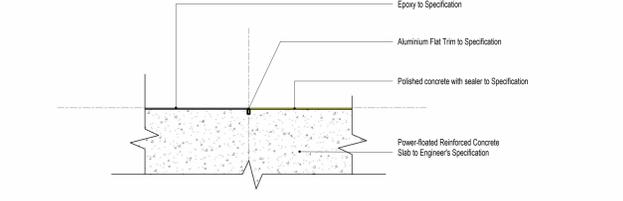


8 Floor transition details_ POLISH CONCRETE - EPOXY
1 : 5

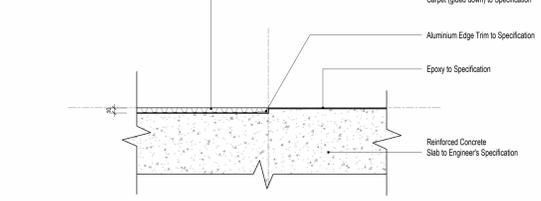


9 Floor transition details_ EPOXY - CARPET
1 : 5

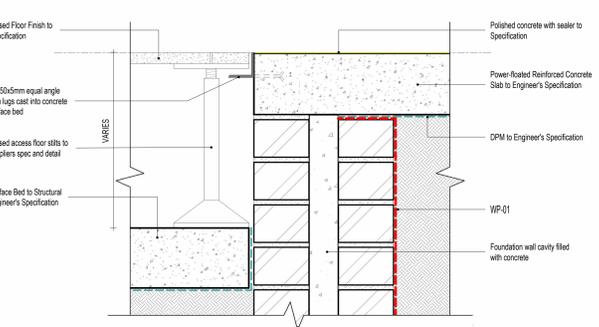


10 Floor transition details_ FFL - RAISED FLOOR
1 : 5

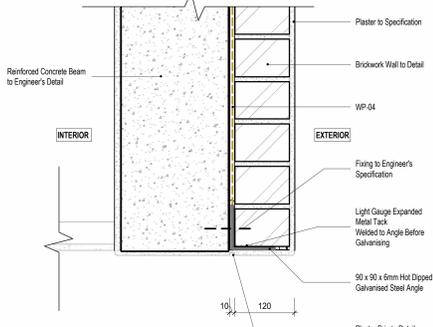


11 Detail - Typical shelf angle
1 : 5

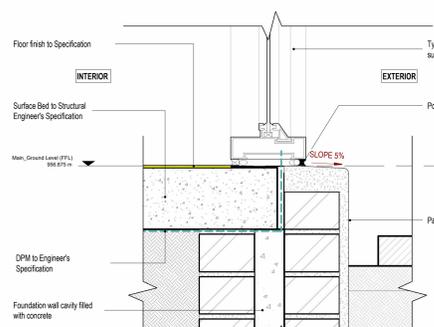

12 Detail - Typical shopfront sill
1 : 5

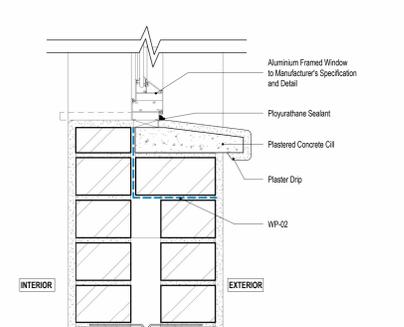

13 window detail - cill
1 : 5

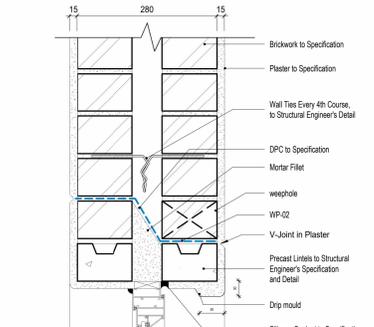

14 window detail - head
1 : 5

FOR TENDER

CONSULTANTS

Project Manager	
Quantity Surveyor	
Structural Engineer	
Civil Engineer	
Mechanical Engineer	
Electrical Engineer	
Water & Fire Services Engineer	
Interior Designer	
Landscaping Architect	
Lighting Specialist	
Client	

Project: **SANSA - Matjiesfontein**

Drawing: **General Assembly Details - FLOORS**

Scale	As indicated	A0	Date	2020/09/02	Drawn	Author
Project No.	C15415.00	Drawing No.	60_1000	Revision No.	B	

SVA
LEAD BUILD DESIGN

88 Floor, The Link, 18/17, Main St, Cape Town City Centre, Cape Town 8001
Tel: +27 21 421 4291 | www.sva-leadbuild.com