

PLATO

MODEL NUMBER

PLATO

SPECIFICATIONS

HOUSING : LM 6 die cast aluminium and extruded aluminium.

LIGHT SOURCE : The fitting is design to operate a 7W LED.

DIFFUSER : High impact acrylic.

FINISH : Powder coated.

MOUNTING : Wall mounted.

CONTROL GEAR : 220V - Direct to mains.

FASTENERS : All external screws are stainless steel.

GASKET : Silicone sponge gasket.

INGRESS PROTECTION : IP65.

OPERATING TEMPERATURE : (T_a) ≤ 35° C.




LIGHT SOURCE

LED SAMSUNG 2835


VOLTAGE (V)	NOMINAL WATTAGE (W)	COLOUR TEMP (K)	NOMINAL FLUX (lm)
220V	7W	4000K	917 lm
		3000K	853 lm

APPLICATION AREAS

Indoor or outdoor application.
Commercial Developments.
Retail Developments.
Shopping malls.
Public buildings.



DIMENSIONS IN MM

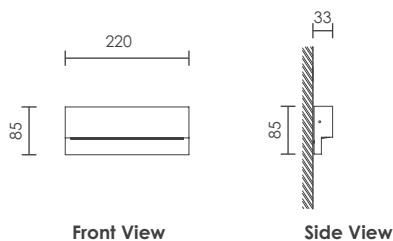

COLOURS

	Black (B)		Matt Silver (M)
	White (W)		Charcoal Grey (C)

LIGHT DISTRIBUTION

LED 7W

