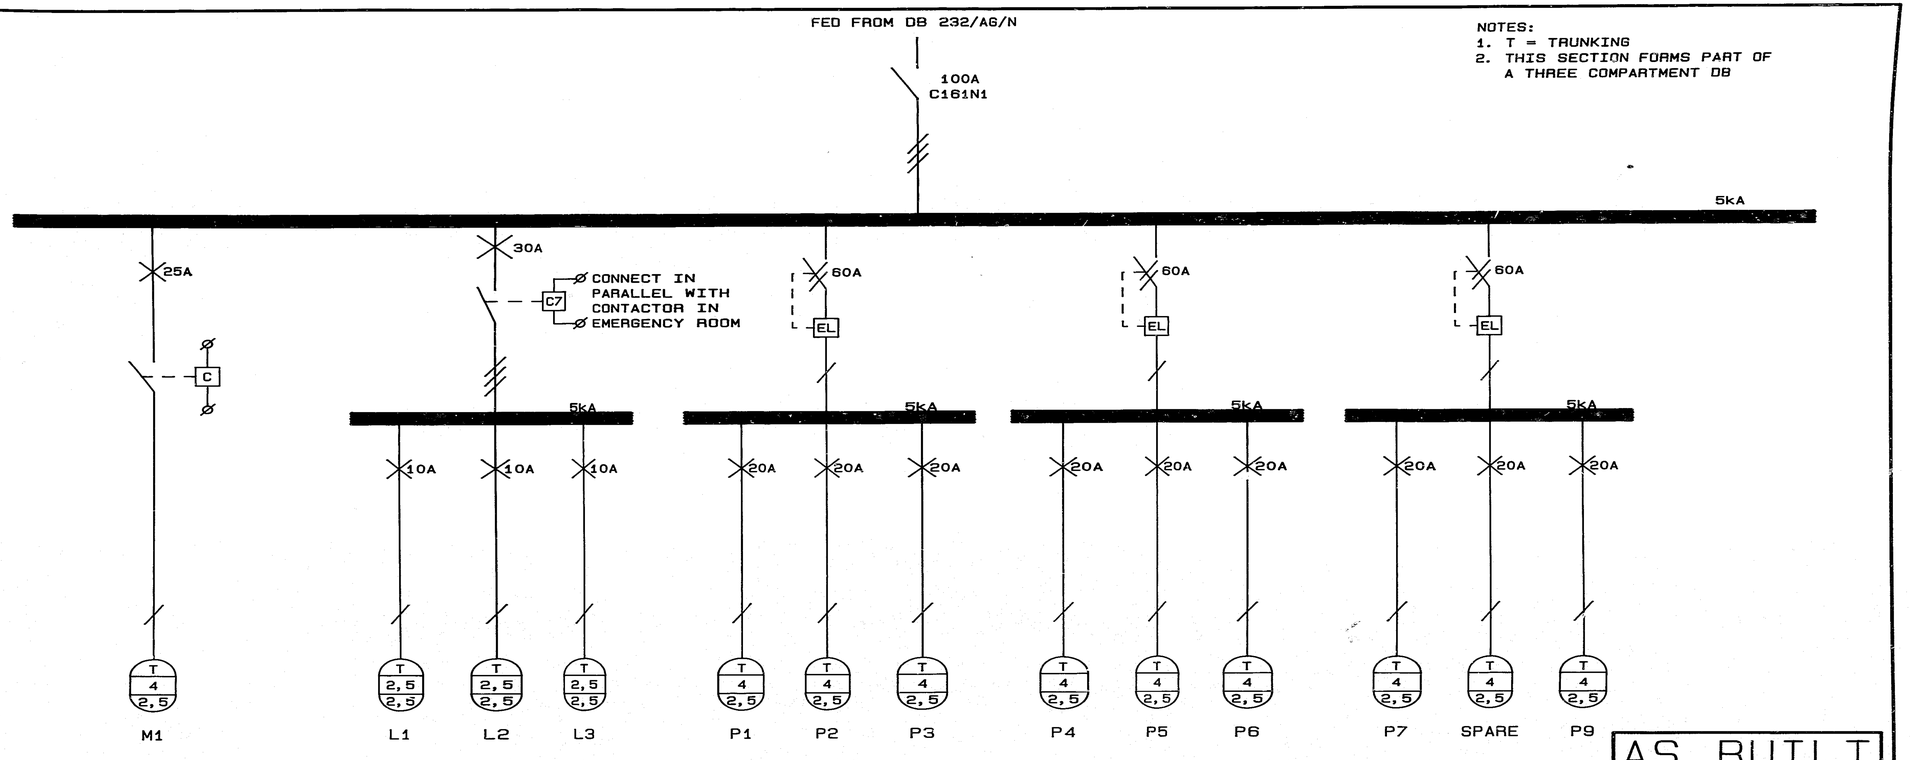

DISTRIBUTION BOARD CONSTRUCTION

RECESSED		LOCKABLE DOORS		COLOUR – MAIN	ELECTRICAL ORANGE	WIDTH	
HALF-RECESSED		SEPERATE DIVISIONS	X	COLOUR – EMERGENCY	RED	HEIGHT	
SURFACE	X	EMERGENCY SECTION	X	COLOUR – UPS	VERDIGRIS GREEN	DEPTH	
FLOOR-STANDING		UPS SECTION	X	COLOUR – NORMAL	ELECTRICAL ORANGE		
DOORS	X	NORMAL SECTION	X	SPARE SPACE	30 %		

DISTRIBUTION BOARD ELECTRICAL SPECIFICATION

BUSBAR RATING	100A	FRONT ACCESS	X	CABLE ENTRY: TOP	X
FAULT LEVEL	5kA	REAR ACCESS		CABLE ENTRY: BOTTOM	X
FULL NEUTRAL	X	SUPPLY: SINGLE CORE		FUTURE EXPANSION	
HALF – NEUTRAL		SUPPLY: CABLE	X	CABLE ENTRY: REAR	
EQUIPMENT	MERLIN GERIN	SUPPLY: BUSBAR		FUTURE EXPANSION	

REVISIONS	NO.	DATE	DESCRIPTION
	1	02/91	ADDED FEED TO A3/N

HOUWTEQ

BKS Inc./Ing

CONS. NO. BKS-4771/232/ZE/041 | REV. Z | SCALE N.T.S.

DESIGNED H.P.M. | DRAWN H.B/CAD | CHECKED H.P.M. | DATE SEPT 1990

TITLE: SCHEMATIC – GROUND FLOOR
DB 232/COMPUTER/N (NORMAL)

DWG. NO. 671/000 2451 | REV. Z