


Plan - 1:100

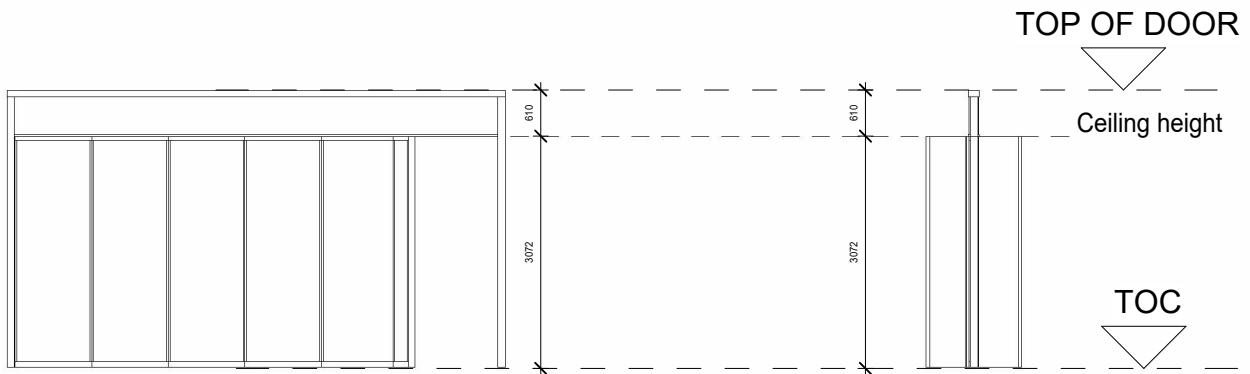

Front/Back - 1:100

Section 1 - 1:100

| Type Mark | Count | Description | Frame Finish | Door Leaf Finish | Ironmongery Type |
|-----------|-------|---|--------------------------------------|---|------------------|
| FD1 | 1 | Hufcor Series U901 Unispan self support system for manually operated accordion partitions. PANELS: Medium Density Fiberboard Header Side Panels with Mineral wool insulation for sound retardation. FACING: Fabric covered. Color to be selected from partition manufacturer's standard line. FRAME: horizontal truss and two support columns, the system attaches to the building for lateral support. Truss to accommodate sound baffle panels and insulation for areas requiring sound control. | Primed and painted to match RAL 7043 | Fabric covered. Color to be selected from partition manufacturer's standard line. | |

| GENERAL NOTES | | Rev | Date | Int | Description |
|---|--|-----|------------|-----|-------------|
| <ul style="list-style-type: none"> - All installation procedures to comply with good building practice and deemed to satisfy the Architect's requirements. - All exposed timber to be rubbed down smooth prior the application of any finish. - To be supplied and installed with all door frames. - This drawing to be read in conjunction with GA-layouts and all dimensions to be checked on site. - Refer any discrepancies to the Architect in writing. | | A | 2024-12-03 | | For Tender |

Title.

Door Type FD1

Drawing No.

SMFN-SVA-AR-30_1020

Scale

1 : 100

Date

2020/09/02

Rev.

A